

LED Linears


LED Cabinet Linkable Bar



Everbright LED Cabinet Linkable Bars

bring energy efficient, long life and environmentally conscious options to traditional Cabinet Light applications.

LED Linkable Bars can save up to 80% power than traditional lights. They have expected life span of 40,000 hours. They contain no lead or mercury and they are RoHS compliant.

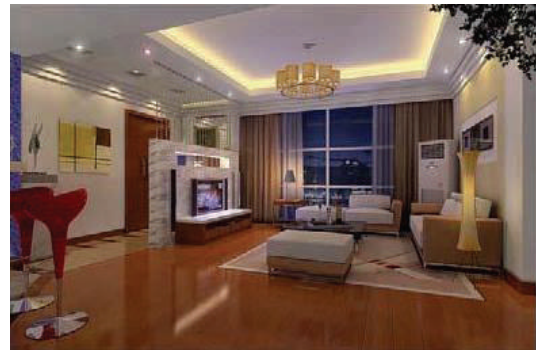

Features


- Lower profile, light aluminum alloy extrusion
- Extendable, 8 meters maximum per channel
- PMMA lens, no hot spot, comfortable lighting
- Easy to connect either snap-in or by cable
- Module length available: 1m, 0.5m, 0.3m, 0.1m
- Fully dimmable

Applications


- Cove lighting
- Architectural lights for canopy, corridor, window and archway
- Backlight or edge lighting for signage
- DIY lights for home use
- Path and contour marking
- Decorative lights for holiday, event, show and exhibition

Dimensions

All dimension unit: mm

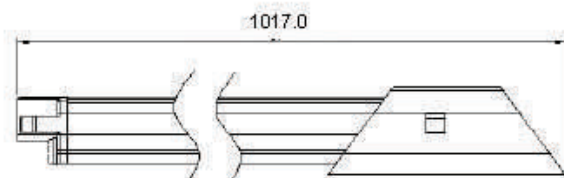

1.0m

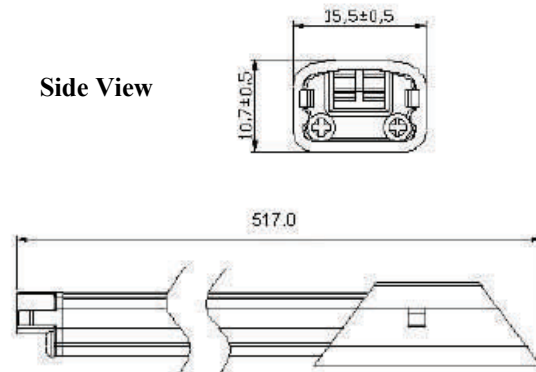


0.5m


Information provided is subject to change without notice. For additional product and application information, please consult Everbright's website: www.everbrightlights.com

LED Linears

LED Cabinet Linkable Bar

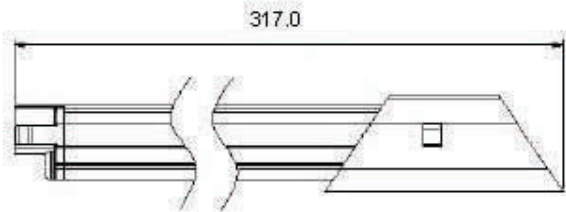

0.3m

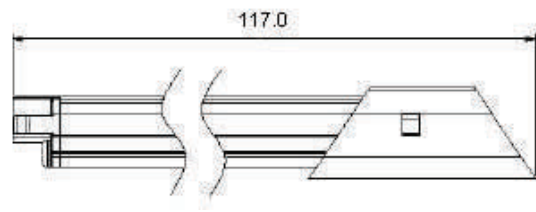

0.1m

Order Code

| Product Code | Length | LED Qty | Color | Color Temp. | Volts | Watts | Rated Lumens | Initial | Rated (hours) | Life CRI | Beam Angle |
|--------------|--------|---------|------------|-------------|-------|-------|--------------|---------|---------------|----------|------------|
| E080101WW | 1.0m | 48 | Warm White | 3000K | 24VDC | 11 | 520 | | 40,000 | 85 | 40° |
| E080101DW | 1.0m | 48 | Cool White | 6000K | 24VDC | 11 | 530 | | 40,000 | 75 | 40° |
| E085001WW | 0.5m | 24 | Warm White | 3000K | 24VDC | 5.5 | 250 | | 40,000 | 85 | 40° |
| E085001DW | 0.5m | 24 | Cool White | 6000K | 24VDC | 5.5 | 260 | | 40,000 | 75 | 40° |
| E083001WW | 0.3m | 14 | Warm White | 3000K | 24VDC | 4.3 | 140 | | 40,000 | 85 | 40° |
| E083001DW | 0.3m | 14 | Cool White | 6000K | 24VDC | 4.3 | 150 | | 40,000 | 75 | 40° |
| E081001WW | 0.1m | 5 | Warm White | 3000K | 24VDC | 1.5 | 40 | | 40,000 | 85 | 40° |
| E081001DW | 0.1m | 5 | Cool White | 6000K | 24VDC | 1.5 | 50 | | 40,000 | 75 | 40° |

Accessories

*The total LED Linkable Bar power consumption should be less than 80% of total power source



E080105
0.5m LED Bar Power Connector



E080106
0.5m LED Bar Connector



E080107
LED Linkable Bar Mounting Clip



ET2448
24VDC 48W Transformer

- Dry location only
- Turn off the power before installation

Information provided is subject to change without notice. For additional product and application information, please consult Everbright's website: www.everbrightlights.com