

LED Flood Lights

LED Flood Light 150W



Everbright LED Flood Lights bring energy efficient, long life and environmentally conscious options to traditional flood Light applications.

LED Flood Lights can save up to 80% power than traditional lights. They have expected life span of 50,000 hours. They contain no lead or mercury and they are RoHS compliant. It has instant on / off and no flickering.



Features

150W LED Flood is a direct replacement for 400W HPS Flood Light. It has its unique thermal design allows for the best heat dissipation and it is rated IP65 and suitable for outdoor application.


Order Code

Product Code	Chip	Color	Color Temp.	Volts	Watts	Rated Lumens	Initial	Rated (hours)	Life	CRI	Beam Angle
E400150W	Bridgelux	Cool White	6000K	120VAC	150	11250		50,000		68	80°
E400150WW	Bridgelux	Warm White	3000K	120VAC	150	10050		50,000		75	80°

Specifications

- Net weight:** 6000g
- Dimensions:** 424mm x 330mm x 120mm
- Beam angle:** 80°
- Connect wires:** L/N/G
- Light source:** Bridgelux
- Input voltage:** 120VAC
- Power factor:** 0.98
- Average illuminance:** Height 4meters: 93lux; 6.7*6.7meter
- Average illuminance:** Height 6meters: 41lux; 10*10meter
- Average illuminance:** Height 8meters: 22lux; 13*13meter
- Working temperature:** -30~40°C
- Storage temperature:** -40~80°C
- Housing material:** Aluminum
- Front cover material:** Tempered glass

Dimensions

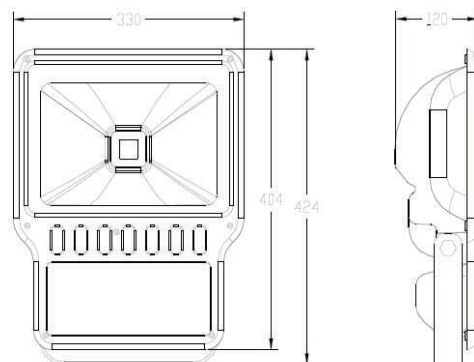

Information provided is subject to change without notice. For additional product and application information, please consult Everbright's website: www.everbrightlights.com