

LED High Bay Lights

LED High Bay Light 200W



Everbright LED High Bay Lights bring energy efficient, long life and environmentally conscious options to traditional flood Light applications.

LED High Bay Lights can save up to 80% power than traditional lights. They have expected life span of 50,000 hours. They contain no lead or mercury and they are RoHS compliant. It has instant on / off and no flickering.



Features

200W LED High Bay Light is a direct replacement for 400W HID High Bay Light. It has its unique thermal design allows for the best heat dissipation.


Order Code

Product Code	Chip	Color	Color Temp.	Volts	Watts	Rated Lumens	Initial	Rated (hours)	Life	CRI	Beam Angle
E450200W	Bridgelux	Cool White	6000K	100~305VAC	150	14000		50,000		75	90°
E450200WW	Bridgelux	Warm White	3000K	100~305VAC	150	12000		50,000		80	90°

Specifications

- Net weight:** 10500g
- Dimensions:** 400mm x 400mm x 640mm
- Beam angle:** 90°
- Connect wires:** L/N/G
- Light source:** Bridgelux
- Input voltage:** 100~305VAC
- Power factor:** 0.95
- Average illuminance:** Height 10meters: 180lux
- Average illuminance:** Height 12meters: 125lux
- Average illuminance:** Height 14meters: 90lux
- Working temperature:** -25~45°C
- Storage temperature:** -30~65°C
- Housing material:** Aluminum Alloy

Dimensions

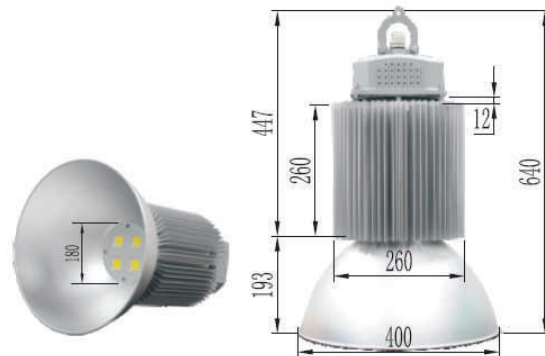

Information provided is subject to change without notice. For additional product and application information, please consult Everbright's website: www.everbrightlights.com