

High Power LED Festoon Bulb

Festoon/LED/6SMT

CE & RoHS Certified




- Drop in replacement
- Low power consumption (1W equivalent to 10W light output)
- Includes Voltage Buck Driver (This bulb consumes the same amount of power 1W throughout the operating voltage range)
- Built-in current limiting resistors
- Shock & vibration resistant
- Long life (10,000hours +)
- Low heat generation
- High intensity
- Instant ON/OFF
- Monochromatic (pure) color

www.everbrightlights.com

Electrical, Technical and Ordering Data

The box below shows 42mm festoon bulb.
EFT337 will be 37mm festoon bulb.

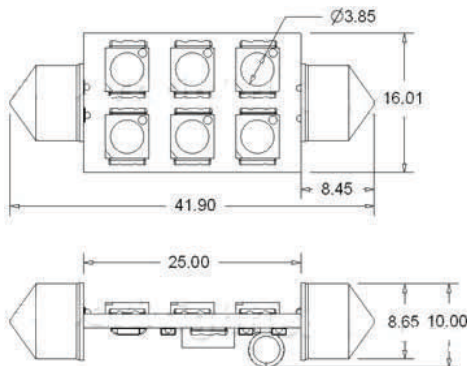

Product Code	Colour	Color Temperature	Light Output
EFT642CW	Cool White	6700k	65Lumens
EFT642WW	Warm White	3000k	58Lumens
EFT642R	Red	610nm	40Lumens
EFT642Y	Yellow	590nm	40Lumens
EFT642G	Green	515nm	45Lumens
EFT642B	Blue	460nm	28Lumens

- Net weight: 10g
- Dimensions: L 42mm x W 16mm x H 10mm
- Beam angle: 120°
- Light source: 6 LEDs
- Energy Consumption: 1W

- Life Time: 10,000 Hours +
- Input Voltage: 8~30V AC / DC
- Body Temperature: <53 Centigrade
- Working Temperature: -30~80 Celsius degree
- Storage Temperature: -40~90 Celsius degree
- Light Attenuation Quotient: 3%-5%/1Kh

CAUTION: To avoid the risks of burn or other injury, turn power off and allow the lamp to fully cool before attempting to replace. Socket condition may affect lamp life. Inspect and replace socket if deterioration has occurred. Do not use this bulb with a dimmer otherwise the warranty void.